


TRU BLU / PRACTICAL INSTALLATION SERIES

First fill & handover

Check the installation, start circulation and keep a useful record.

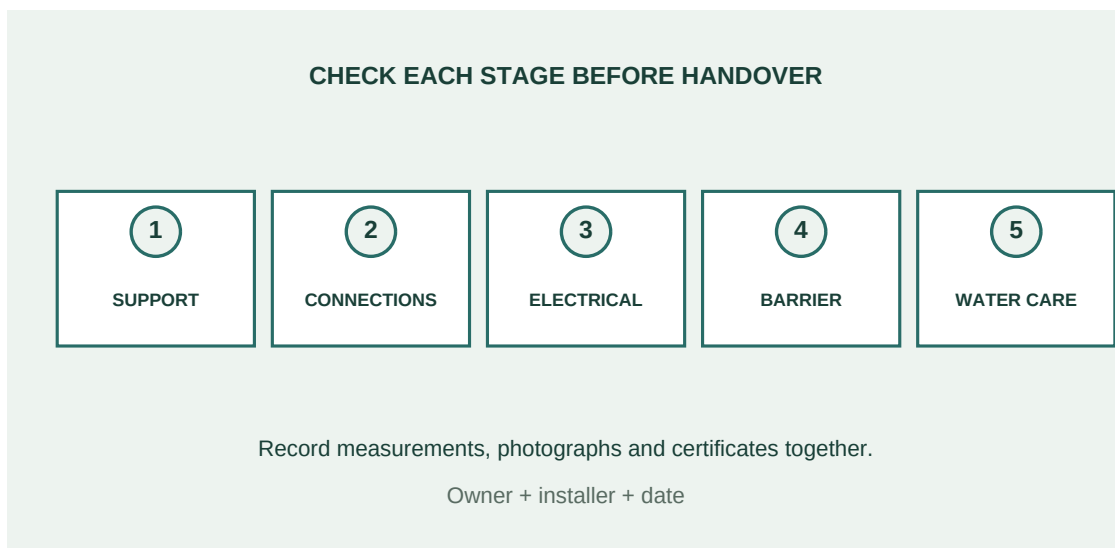

Work through this manual

Page	Stage
2	Before the first fill
3	Fill to the operating waterline
4	Start treatment and optional equipment
5	Complete the installation record


Have these ready

Supplied equipment manuals | Starter-kit test bottle and thermometer | Water test equipment / pool-shop testing | Commissioning record and installation photographs

Use with your supplied pool construction detail and equipment instructions. Dimensions on functional diagrams are not drilling templates. DIY assembly is supported; electrical work requires a licensed electrician.

01 / FIRST FILL & HANDOVER

Before the first fill

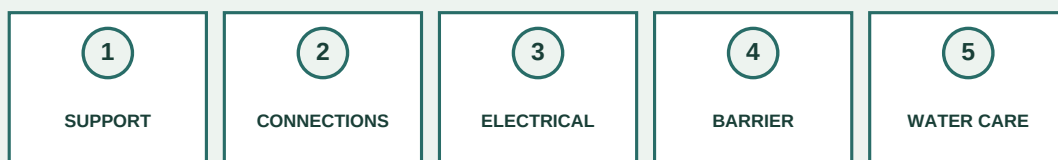CHECK EACH STAGE BEFORE HANDOVER

Record measurements, photographs and certificates together.


Owner + installer + date

1. Confirm full, level support, retained edges and finished drainage. Check no construction debris remains inside the shell.
2. Verify cured seals, supported plumbing, closed drain fittings and accessible service connections. Check suction covers and fasteners.
3. Complete licensed electrical work and the required barriers / inspection sequence. Keep children excluded throughout filling and startup.
4. Prepare water-care supplies and agree the operating waterline. The maximum brim-full calculation is not the working fill volume.

Use the certifier's required sequence. Registration, barrier compliance and occupation/use approval are separate records where applicable.

02 / FIRST FILL & HANDOVER

Fill to the operating waterline

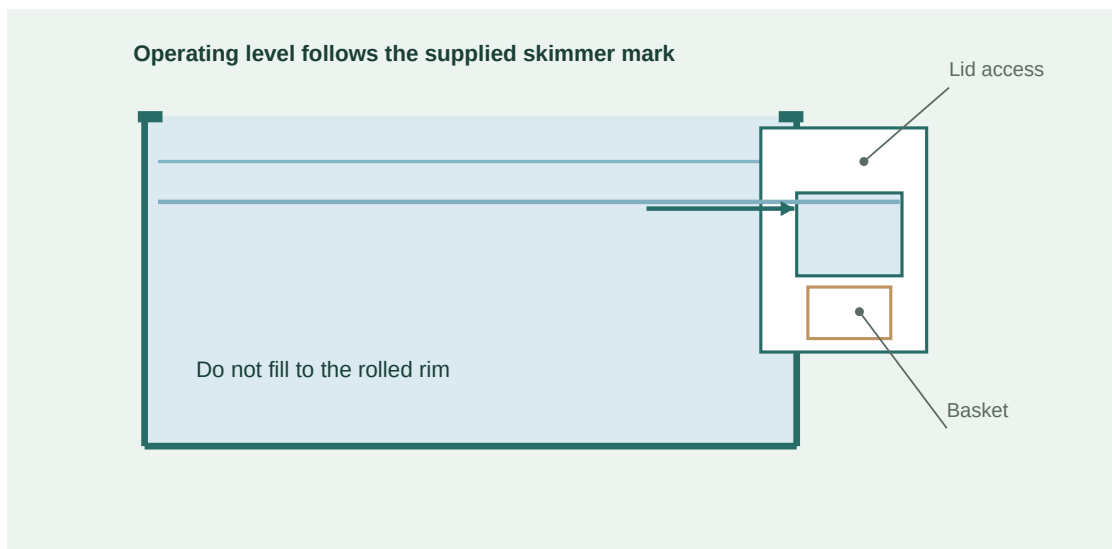


1. Fill gradually and monitor the shell, base and fittings. Inspect for leaks as water reaches each connection.
2. Stop filling at the operating line set for the supplied skimmer. Record the filled depth or water-meter difference if a working volume is needed.
3. Open the correct circulation valves. Prime the pump and bleed filter air using their instructions before sustained running.
4. Inspect the complete circuit under operation and label normal valve positions. Stop and isolate before correcting a fault.

Job check / record	Result
Fill date / water source	_____
Operating waterline / working volume	_____
Static fitting inspection	_____
First circulation check	_____

Never dry-run the pump or energise an exposed underwater lamp.

03 / FIRST FILL & HANDOVER

Start treatment and optional equipment

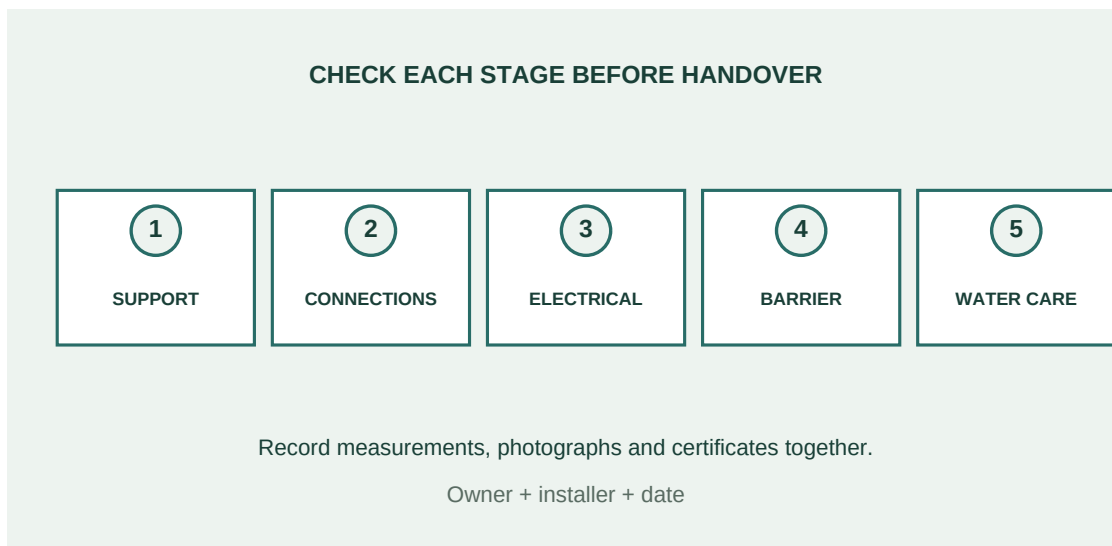

1. Confirm clear circulation, clean-filter pressure and no persistent air entry. Keep equipment service lids and isolation controls accessible.
2. Enable the assembled UV system with coordinated filtration operation. UV treats passing water but does not leave residual sanitiser in the pool.
3. Test the water and establish the specified compatible water-care programme. Do not put concentrated chemicals into the skimmer or directly against the coating.
4. If selected, commission the heat pump and submerged light using their respective procedures. Demonstrate controls and isolation.

Job check / record	Result
Clean-filter pressure	_____
Water test / treatment programme	_____
UV indicator / timer	_____
Heat / light tests if selected	_____

Fresh-water top-ups are not a substitute for measured water care and a suitable sanitiser residual.

04 / FIRST FILL & HANDOVER

Complete the installation record

CHECK EACH STAGE BEFORE HANDOVER

1

SUPPORT

2

CONNECTIONS

3

ELECTRICAL

4

BARRIER

5

WATER CARE

Record measurements, photographs and certificates together.
Owner + installer + date

1. Keep order, delivery and installation details together with the manuals. Record model and serial numbers before labels become difficult to reach.
2. Attach foundation, hidden-service, fitting and equipment photographs. Keep electrical, approval, inspection and registration records.
3. Show the owner basket removal, filter pressure reading, normal valve positions, controls, waterline and routine water testing.
4. Check the starter kit: leaf skimmer, wall brush, telescopic pole, thermometer, test bottle and CPR sign. The optional Telsa 50 has its own pole included.

Job check / record	Result
Pool size / order reference	_____
Pump / filter / UV serials	_____
Electrical / inspection records	_____
Water-care instructions handed over	_____
Owner / installer / date	_____

For support, email contact@trublupools.com.au with your order number, photographs and the relevant equipment model.

Technical references

Supplied equipment manuals and site approval / inspection schedule.

[NSW pool owner obligations - open official instructions](#)